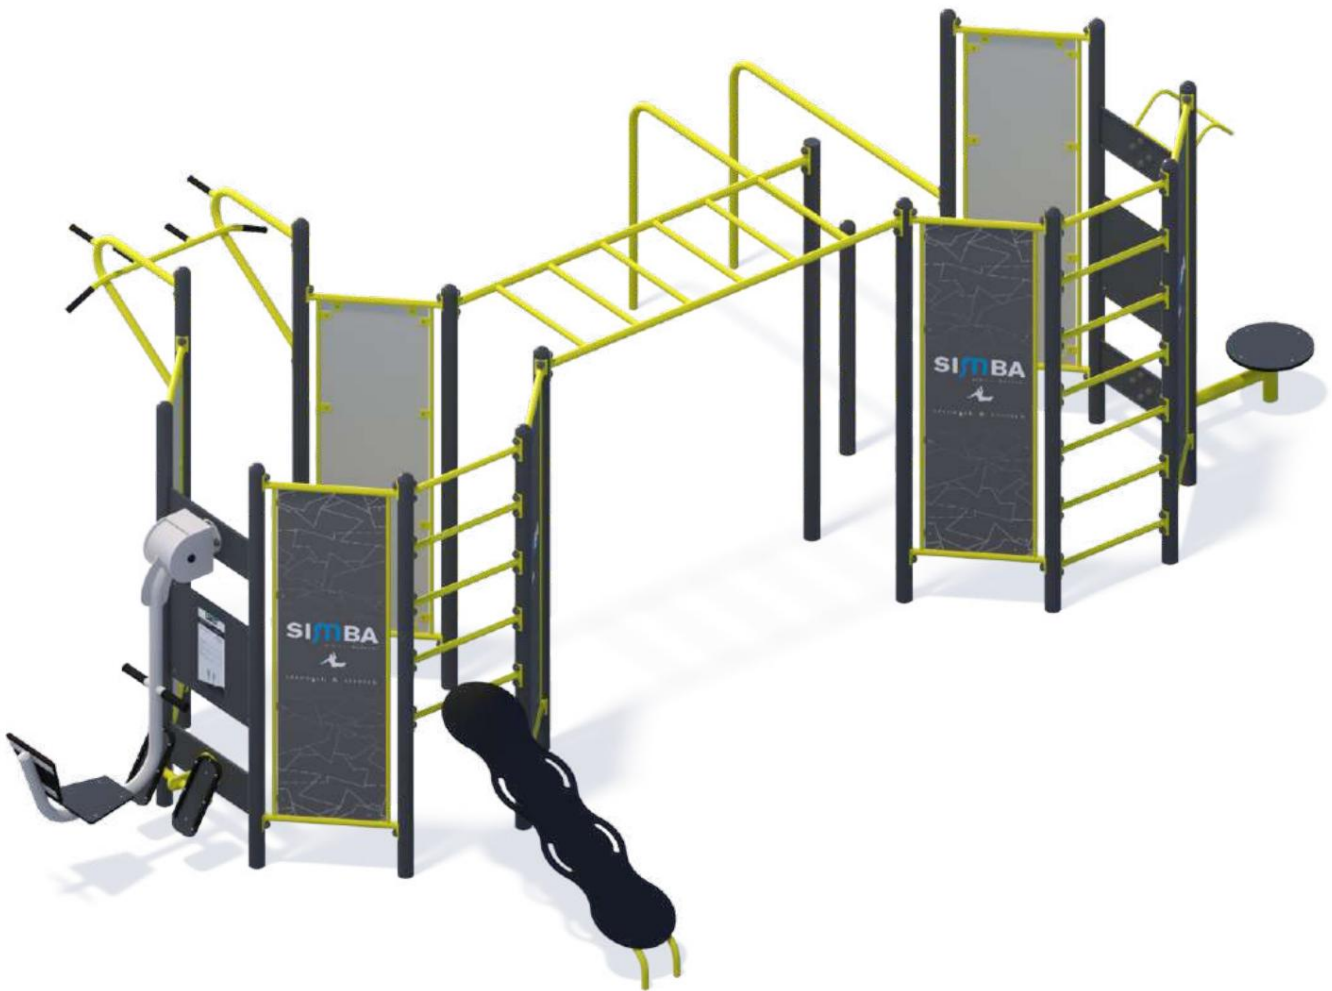



STREET FITNESS SW+FI-005 INDIVIDUAL COLOURING



*Instructions must be printed in color

2025

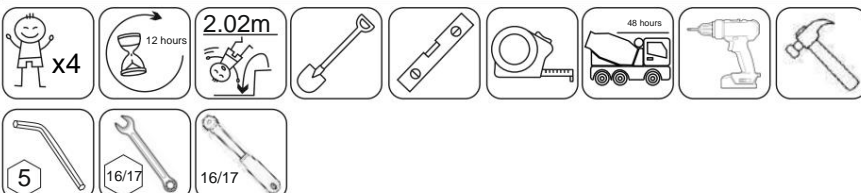ALL STAGES OF FOUNDATION AND ASSEMBLY MUST BE PHOTOGRAPHICALLY DOCUMENTED.
THE LACK OF PHOTOGRAPHIC DOCUMENTATION WILL AFFECT THE ISSUANCE OF THE WARRANTY CARD.



Examples of standard impact-absorbing materials, their thicknesses and their corresponding maximum free fall heights (**according to EN 1176-1:2024**)

MATERIAL ^[a]	DESCRIPTION	THICKNESS MINIMUM ^[b]	MAXIMUM HEIGHT FREE FALL
If the completed surface is verified (e.g. sieve test) in accordance with this Table or has a test report in accordance with EN 1177 , no further tests are necessary.	mm	mm	mm
TURF / SOIL	-	-	less than or equal to 1,000 ^[d]
BARK	grain size from 20 to 80	200	less than or equal to 2,000
		300	less than or equal to 3,000
WOOD CHIPS	grain size from 5 to 30	200	less than or equal to 2,000
		300	less than or equal to 3,000
SAND OR GRAVEL ^[c]	grain size from 0.25 to 8	200	less than or equal to 2,000
		300	less than or equal to 3,000
OTHER MATERIALS AND OTHER THICKNESSES	According to EN 1177 testing		Critical fall height according to the study

^[a] For further information on specific materials suitable for use on playgrounds children's play areas see CEN/TR 16598 (Collection of justifications for the requirements of EN 1176-1)

^[b] For bulk material, add 100mm to the minimum depth to compensate for displacement (see 4.2.8.5.1)

^[c] Sand and gravel should be well rounded and washed to eliminate most silt or clay particles. Washed sand or gravel is considered to be from alluvial (naturally eroded) deposits and free from most silt or clay particles. Gravel may be commonly referred to as "cobble." The uniformity coefficient D60/D10 <3.0. Particle size can be determined using a sieve test according to EN 933-1 (see Annex G).

^[d] See NOTE2 in 4.2.8.5.2.

INSTALLATION / ASSEMBLY

ÿ Installation only in a place ensuring a minimum free area - the so-called impact surface; ÿ Installation of the device in accordance with the design documentation while maintaining the following conditions;

ÿ The distance of the device from windows of rooms intended for human occupancy, from roads and places intended for waste collection should be at least 10 meters;

ÿ Distance from the playground to parking spaces for passenger cars: a) 7 m for up to 10 spaces inclusive, b) 10m in the case of 11 to 60 stations inclusive, c) 20m in the case of more than 60 stations, ÿ Installation

in an undeveloped area; ÿ Installation outside the safety zone of existing devices;

Particular attention should be paid to: - vertical positioning of the posts, - horizontal positioning of the bars and crossbars; -tightening screws and other fasteners;

INSTRUCTIONS FOR INSPECTION AND MAINTENANCE OF THE DEVICE

INSPECTION AND MAINTENANCE INSTRUCTIONS FOR RESPONSIBLE PERSONS FOR SAFETY IN THE RECREATIONAL AND SPORTS AREA

Daily inspection of the area, during which attention should be paid to: ÿ

cleanliness of the area (all rubbish and items not belonging to the equipment of the square should be removed

playgrounds); ÿ clearances between the device and the ground; ÿ condition of the ground surface; ÿ shifted foundations; ÿ finishing of smoothed surfaces; ÿ missing and broken parts; ÿ condition of individual element connections.

Weekly inspection: ÿ

checking the condition of screw connections - tighten if loose; ÿ checking the condition of wooden surfaces - remove splinters if damaged.

Monthly inspection should include: ÿ checking

the functionality and stability of the device, tightening the screw connections if necessary occur;

ÿ supplementing the loose materials filling the area of the fall surface up to the base level mark placed on the device.

The inspection carried out at least **once a year** should include: ÿ inspection

of the technical condition and technical tests by the manufacturer's representative as part of concluded contract;

ÿ supplementing and levelling of soil and grass surfaces in the most exposed and intensively used areas; ÿ after each inspection, any irregularities found should

be immediately rectified or the use of faulty equipment should be prevented from being used until it is repaired; ÿ records of all actions taken as part of safety supervision

should be kept in the equipment inspection and control book.

NOTE: The annual main inspection may require the unearthing or disassembly of parts of the unit.

REPLACEMENT OF WORN OR DAMAGED COMPONENTS

Metal parts of the device, connecting elements, and other components of the device are subject to replacement. If damage is detected, the following should be done: ÿ Secure the device from users until it is removed by fencing it.

ÿ construction warning tape with a suspended board informing about the damage; ÿ dismantle the damaged part of the device that poses a risk to playing children, e.g.: exposed parts of metal connectors, etc. ÿ during repairs, replace damaged or worn parts with identical ones supplied by the product manufacturer; ÿ if necessary, contact the device manufacturer's service center.

INSTRUCTIONS FOR INSPECTION AND MAINTENANCE OF THE DEVICE

In the area where the devices are installed, a board should be placed containing: ÿ the regulations for using the device; ÿ the telephone numbers of the fire brigade (998), ambulance service (999), police (997), site supervisor and the emergency number 112; ÿ all entrances and passages intended for users of the area and emergency services. must be constantly available, free from any obstacles.

INSTRUCTIONS - DEADLINE TESTING

After the device is installed, jam tests should be performed to verify correct installation. All tests should be performed under the most unfavorable conditions.

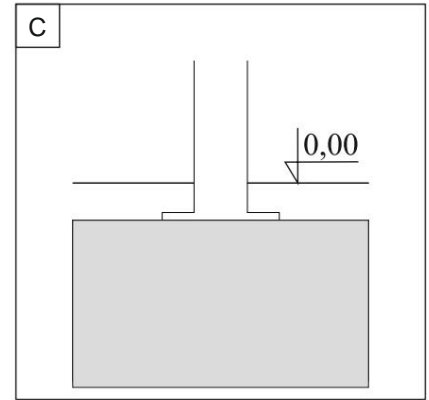
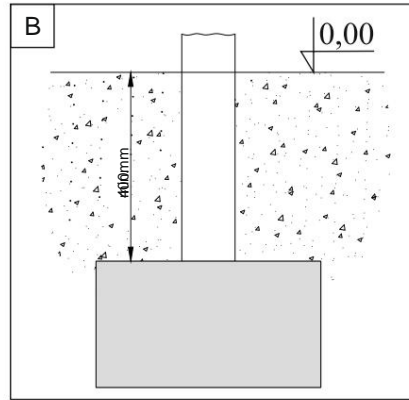
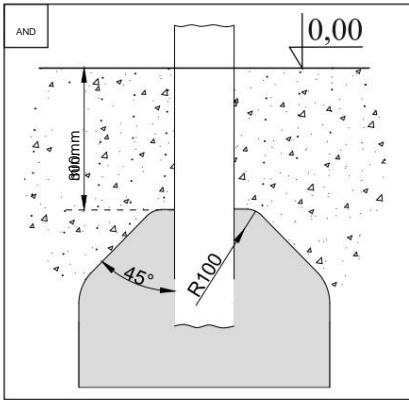
Instructions prepared on the basis of the **EN 1176 1:2024** standard (Part 1: General safety requirements and test methods).

- 1 Perform **head and neck** entrapment testing using probes/templates in fully enclosed, partially enclosed and V-shaped openings according to procedure **D.2.1.2** and **D.2.2.2**.
- 2 Perform a **clothing** entrapment test using a testing device/button/chain in accordance with procedure **D. 3.2.** on tested devices such as: slides, fireman's poles, canopies.
- 3 Perform a **finger** pinch test using the finger probe according to procedure **D.4.2**.
- 4 Test **the chain holes** using a chain tester according to procedure **D.5.2**.
- 5 Perform an examination/measurement of devices that may cause **whole body** entrapment based on point **4.2.7.4**.
- 6 Perform an examination/measurement of gaps that may cause **foot or leg** entrapment based on point **4.2.7.5**.

A review of possible pinch situations should be carried out based on Table **E.1** (Annex E of EN 1176-1:2024)

BASIC FOUNDATION

FOUNDATION SHAPES




A The **FOUNDATION** has R100 roundings - the minimum distance is **300 mm** below the ground;


B The **FOUNDATION** has no roundings, the minimum distance is **400 mm** (for loose surfaces: sand, gravel, etc.);

C **FOUNDATION SLAB** , fastening with chemical anchor (safe surface - SBR/EPDM).

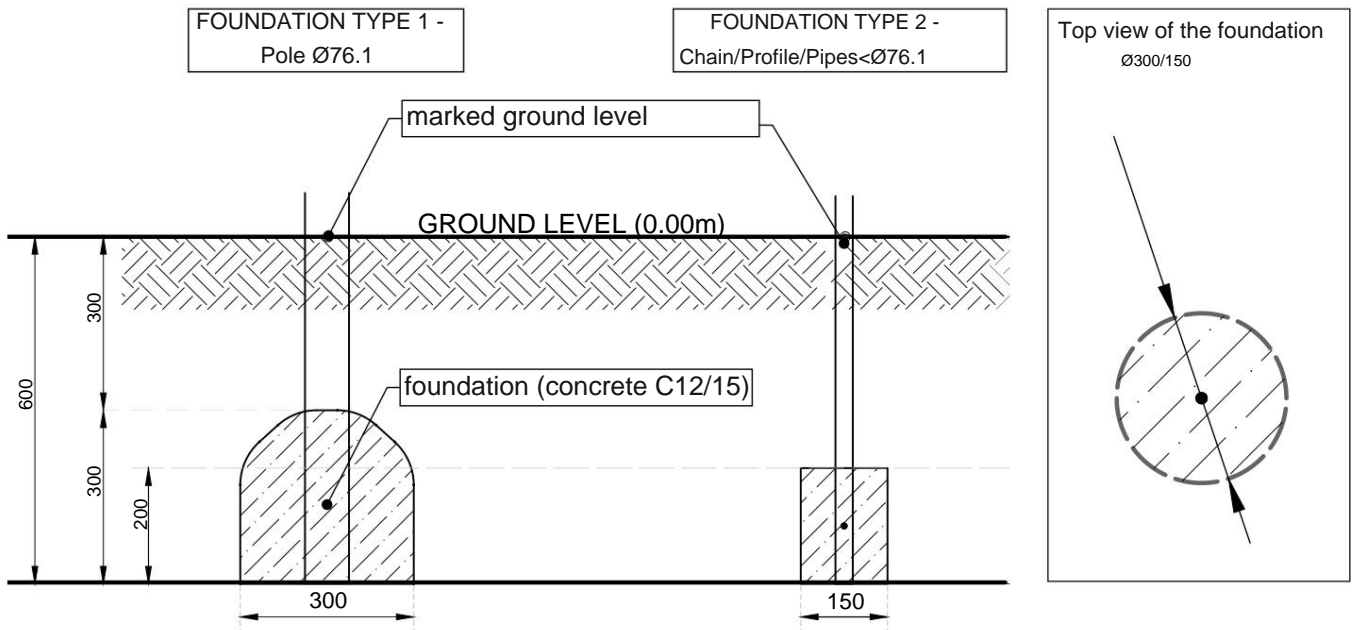MEASUREMENT OF FOUNDATIONS IN PLAYGROUNDS AND OUTDOOR GYMS



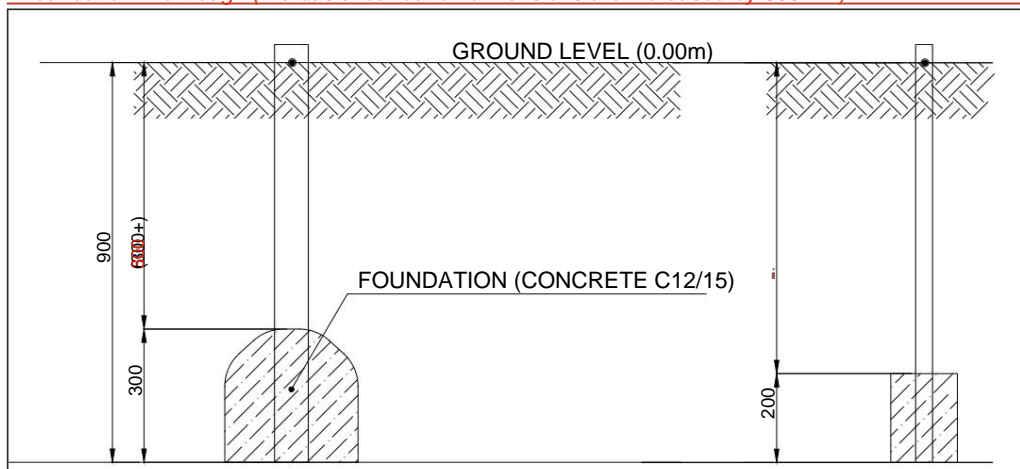**Foundation in a trough (the basic foundation dimensions are increased by 300mm)*



NOTE! Foundations for columns larger than 76.1 mm should be carried out according to individual instructions or technical documentation.

SIMBA[®]
Group

*Dimensions given in units [mm]

FOUNDATION STAGES

1 PREPARING THE SUBSTRATE FOR THE DEVICE TO BE MOUNTED

1.1. Based on the foundation dimensions (provided in the instructions), dig a foundation trench to the appropriate width and depth.

1.2. The bottom of the trench should be leveled and compacted (it should form a stable base for the foundations).

2 PLACING THE DEVICE IN THE TRACKS AND INSTALLING IT

2.1. The metal plates at the bottom of the posts should be angled 45° (to form anchors). The device posts should be placed in trenches.

2.2. Assembling the entire set (aligning the verticals and horizontals using a spirit level).

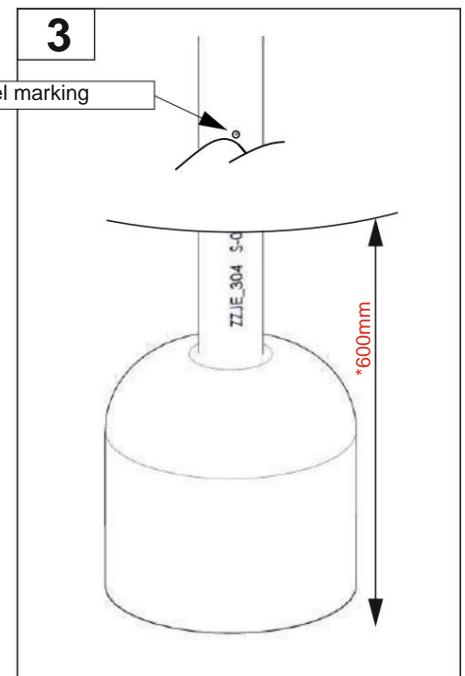
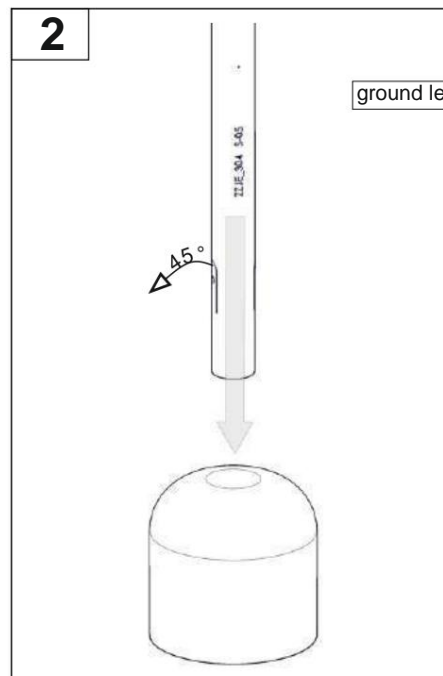
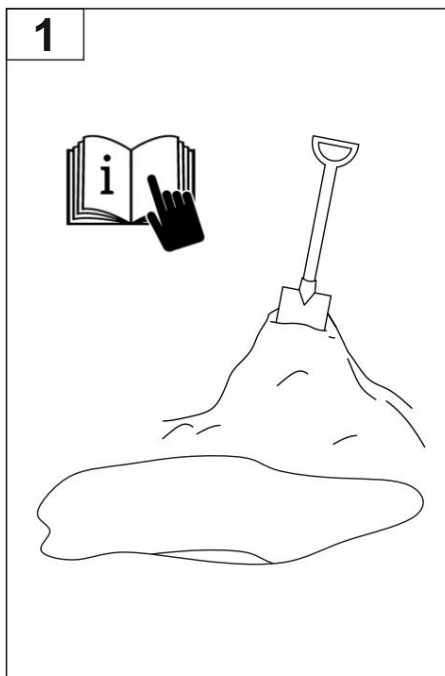
2.3. The poles placed in the trench are poured with the previously prepared concrete mixture.

3 PROTECTING THE DEVICE AGAINST USE

3.1. The device must be secured against use until the foundations have set (their appropriate strength parameters have been achieved).

3.2. After the concrete has set, the excavations should be backfilled with a layer of soil to the ground level in accordance with the documentation (the ground level should be marked on the posts).

3.3. Once the device is fully assembled and stabilized, remove the safety device.



*the depth of the excavation and foundation should be made according to the basic foundation (individual foundations included in the instructions)

ALL STAGES OF FOUNDATION AND ASSEMBLY MUST BE PHOTOGRAPHICALLY DOCUMENTED.

THE LACK OF PHOTOGRAPHIC DOCUMENTATION WILL AFFECT THE ISSUANCE OF THE WARRANTY CARD.

FALL SPACE RANGE

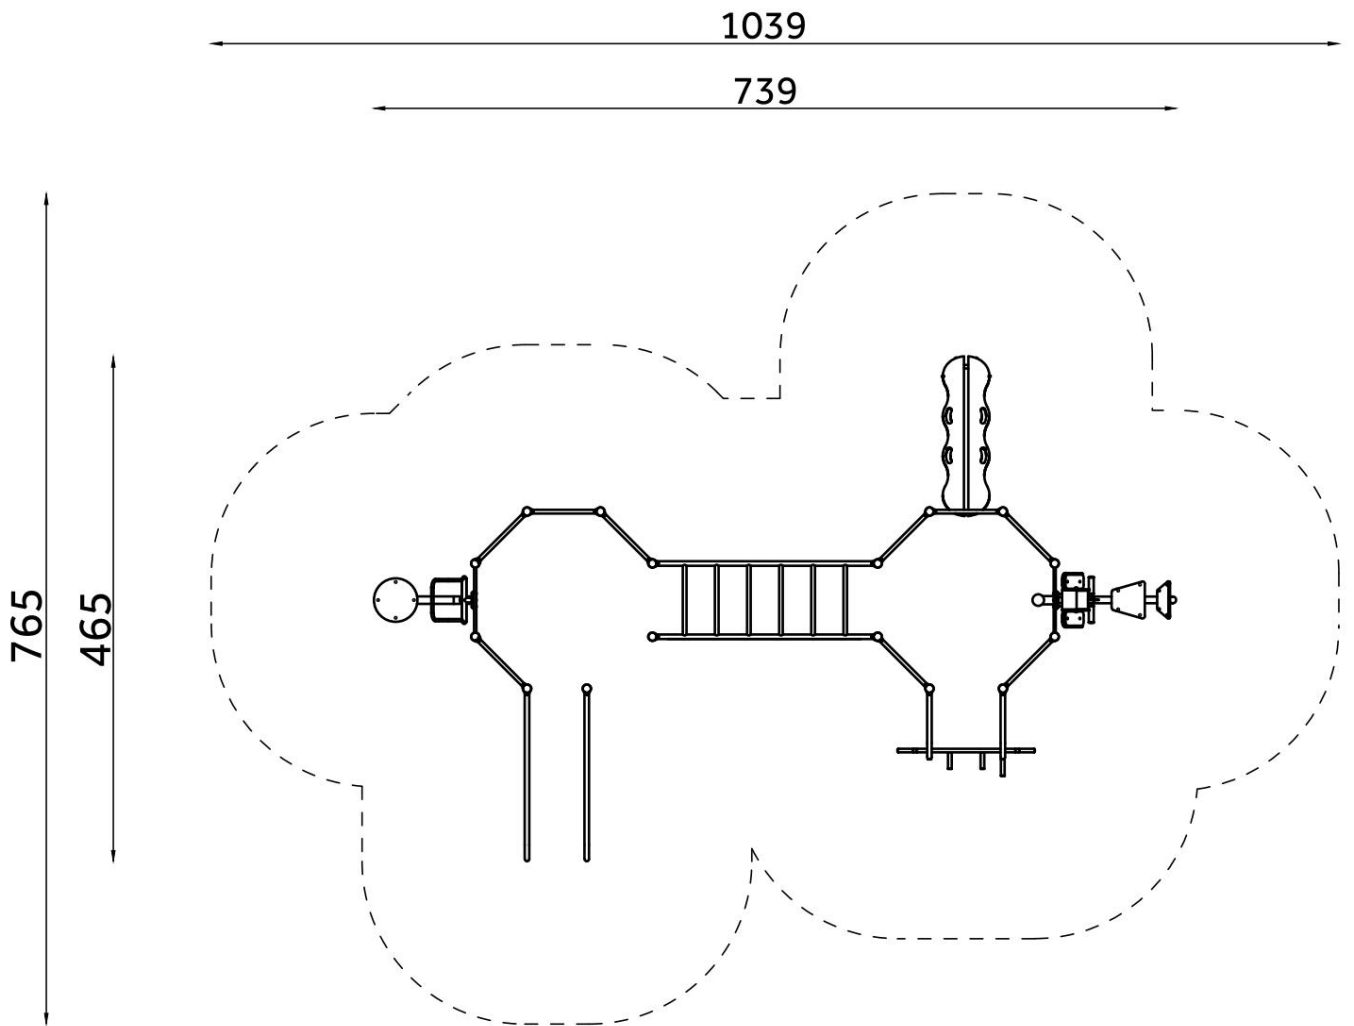




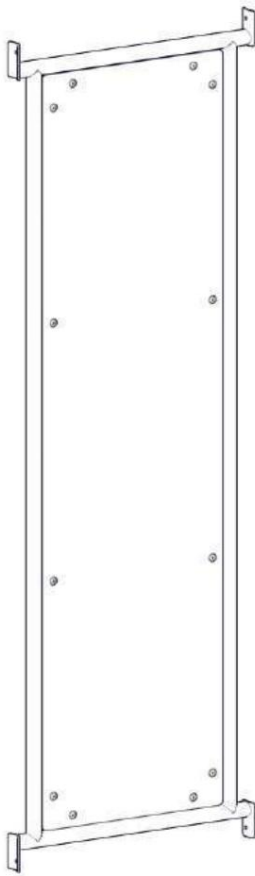
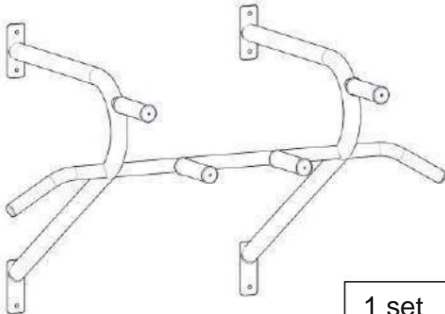
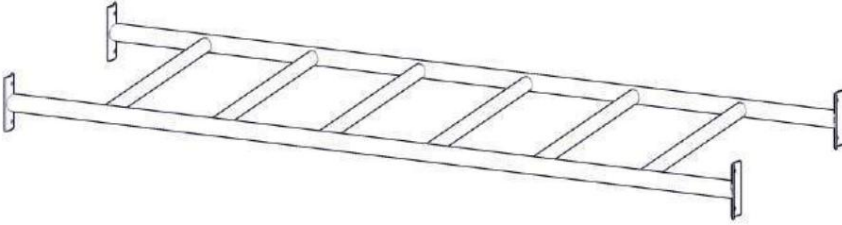
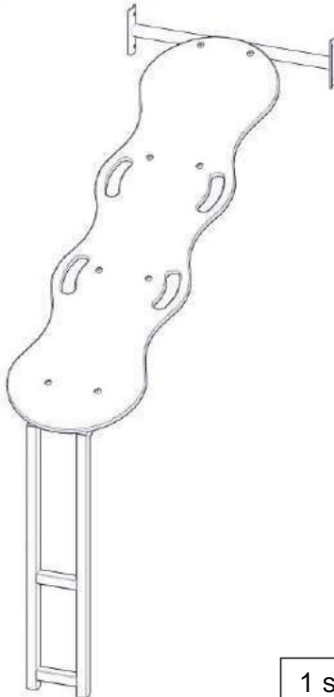


Fig. 1. Top view of the device - minimum free area.




WARNING! Ensure that the surface at the incident site is free of sharp edges or protruding objects. Install the surface without creating any pinch points.

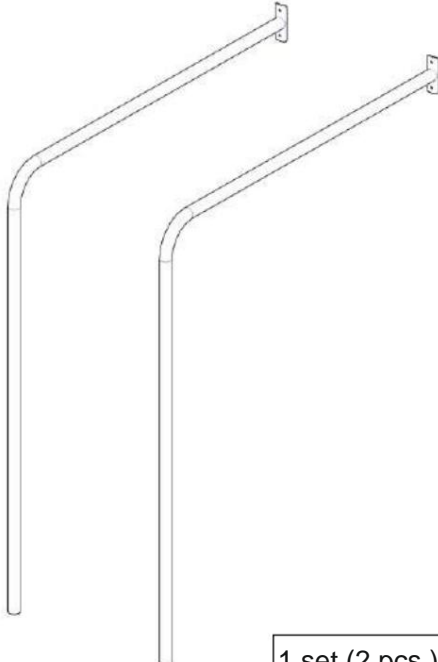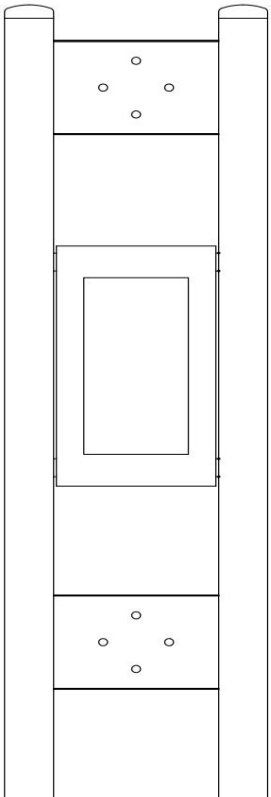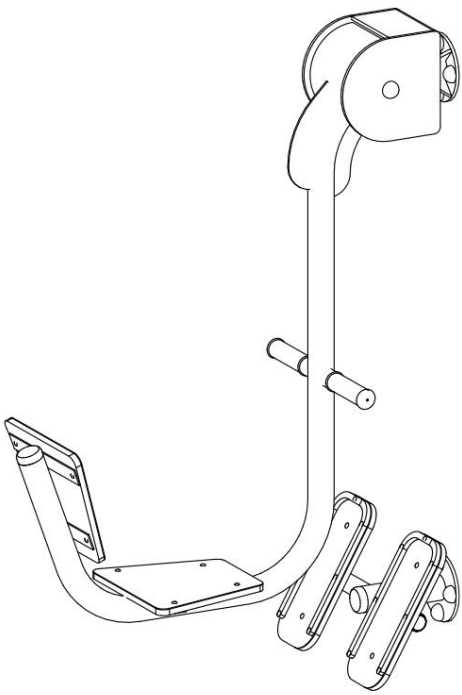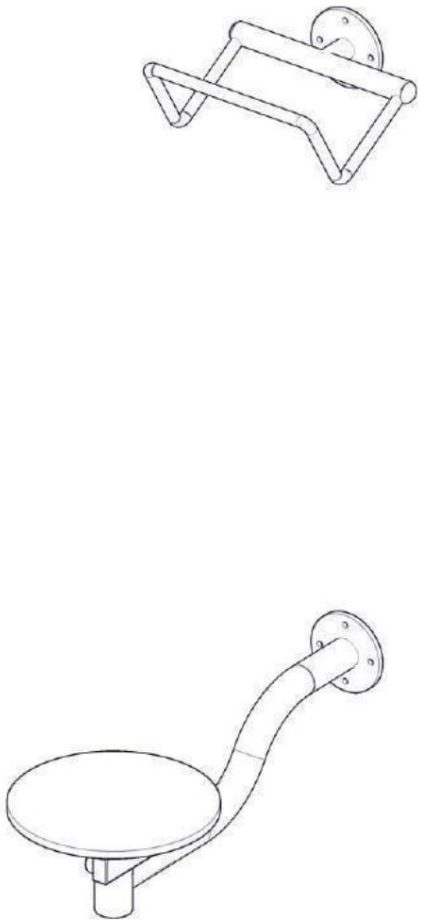LIST OF ELEMENTS INCLUDED IN THE SET











<p>SW_014_4_Vertical_ladder 60-123-4</p>  <p>1 set</p>	<p>SW_029_Straight_stick 60</p>  <p>7 pcs.</p>	<p>SW_052_Board_with_graphics</p>  <p>7 sets</p>
<p>SW_026_Multifunctional_stick</p>  <p>1 set</p>	<p>SW_016_Horizontal_ladder 60</p>  <p>1 set</p>	<p>SW_050_Fitness_Pylon</p>
<p>SW_034_High_inclined_bench</p>  <p>1 set</p>	<p>SW_036_High_Handrail</p>  <p>1 set (2 pcs.)</p>	 <p>2 sets</p>

NOTE! Before assembly, check the quantity of individual components included in the kit. The number of mounting components may not match the list (individual components are assembled before shipping to the customer).

LIST OF ELEMENTS INCLUDED IN THE SET

FI_005_Foot_press	FI_015_Twister	Pole (with different openings and heights)
		
1 set	1 set	12 sets


LIST OF FASTENING ELEMENTS

				
DIN 7380-2 M8x30 Allen screw with washer head	ISO 4017/DIN 933 M10x40 Hexagon head screw 16	DIN 125 A10.5 Round flat washer	ISO 10511 M10 Self-locking hexagon nut	ISO 4032 M10 Hexagonal nut
28 pcs.	pcs.	164 pcs.	66 pcs.	32 pcs.
				
CAP CONCAVE M8	CAP CONCAVE M12	CAP FLAT M12	CAP CAP M8	CAP CAP M12
28 pcs.	132 pcs.	32 pcs.	28 pcs.	164 pcs.

NOTE! Before assembly, check the quantity of individual components included in the kit. The number of mounting components may not match the list (individual components are assembled before shipping to the customer).



SIMBA[®]
Group

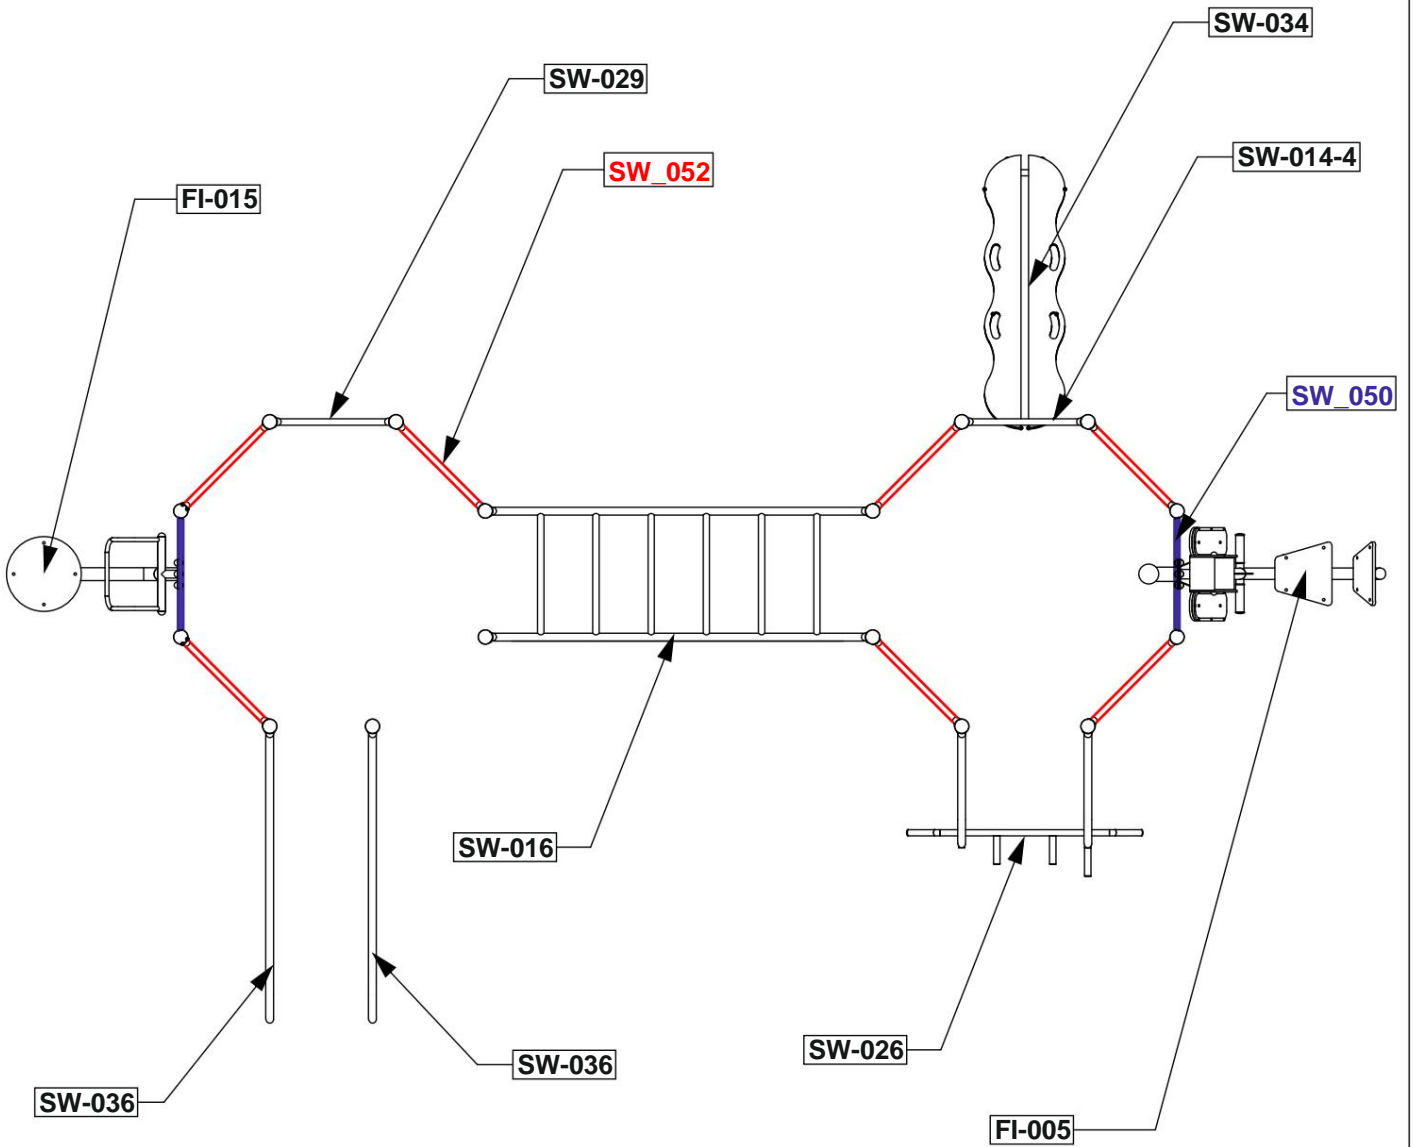ARRANGEMENT OF SET COMPONENTS



SIMBA[®]
Group

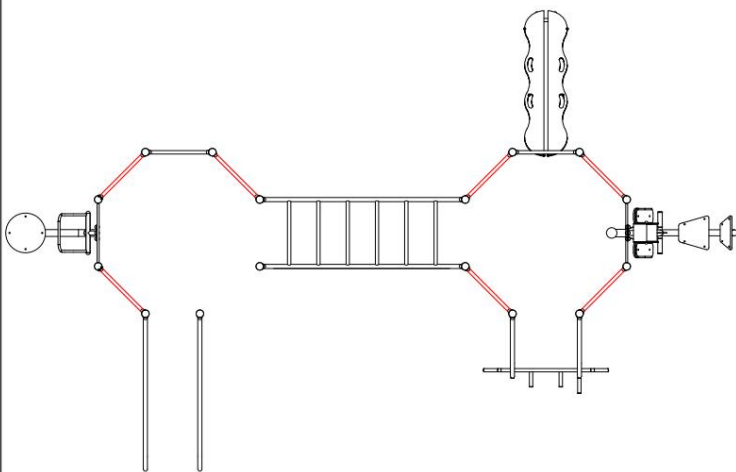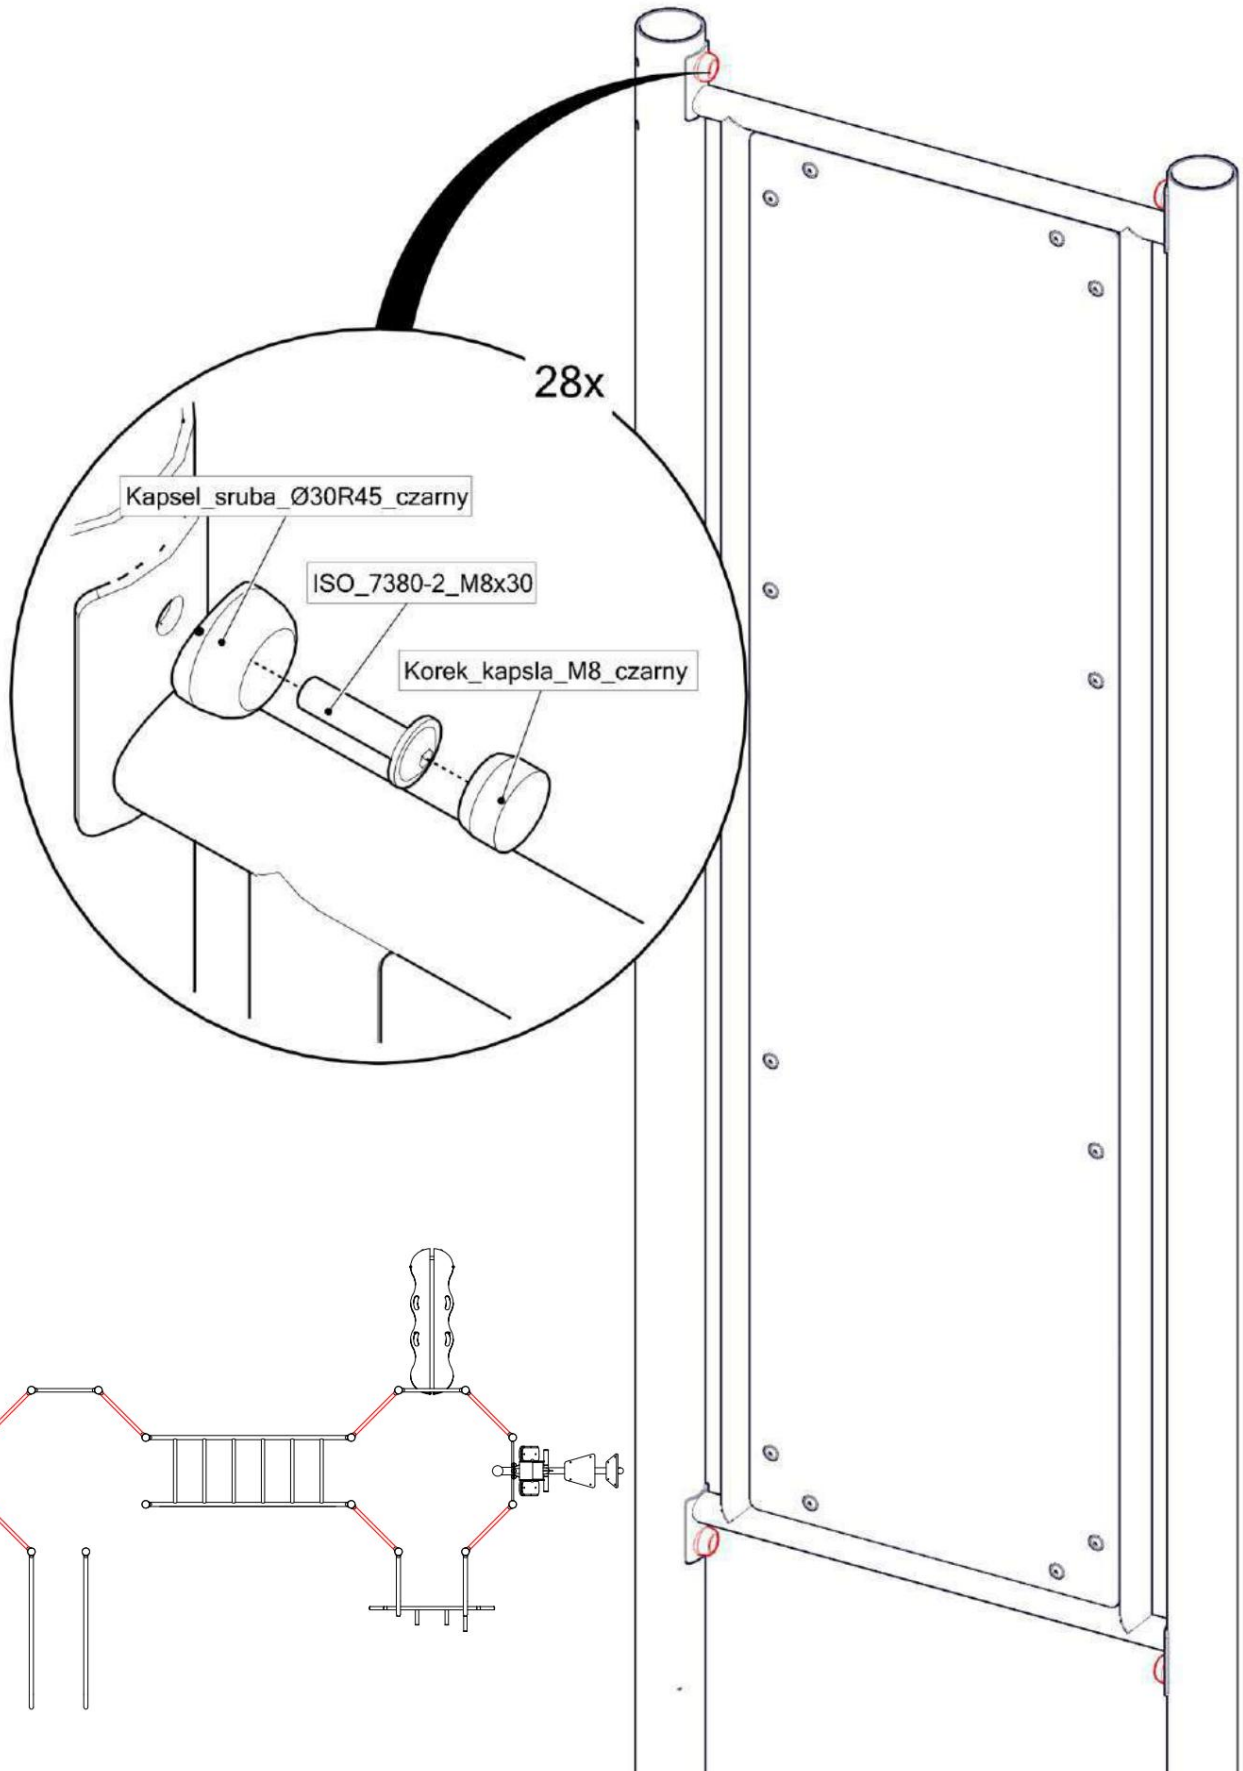MOUNTING THE GRAPHIC BOARD TO THE POLE



ALL STAGES OF FOUNDATION AND ASSEMBLY MUST BE PHOTOGRAPHICALLY DOCUMENTED.
THE LACK OF PHOTOGRAPHIC DOCUMENTATION WILL AFFECT THE ISSUANCE OF THE WARRANTY CARD.



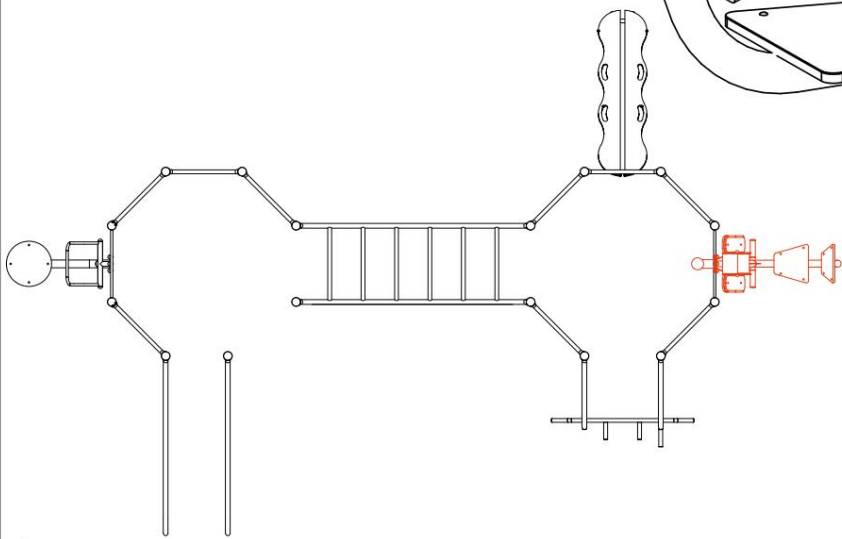
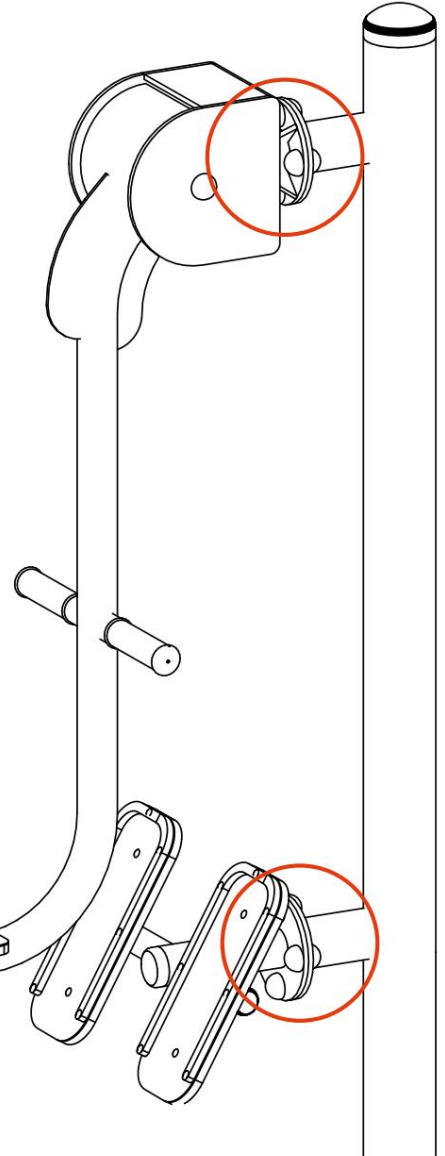
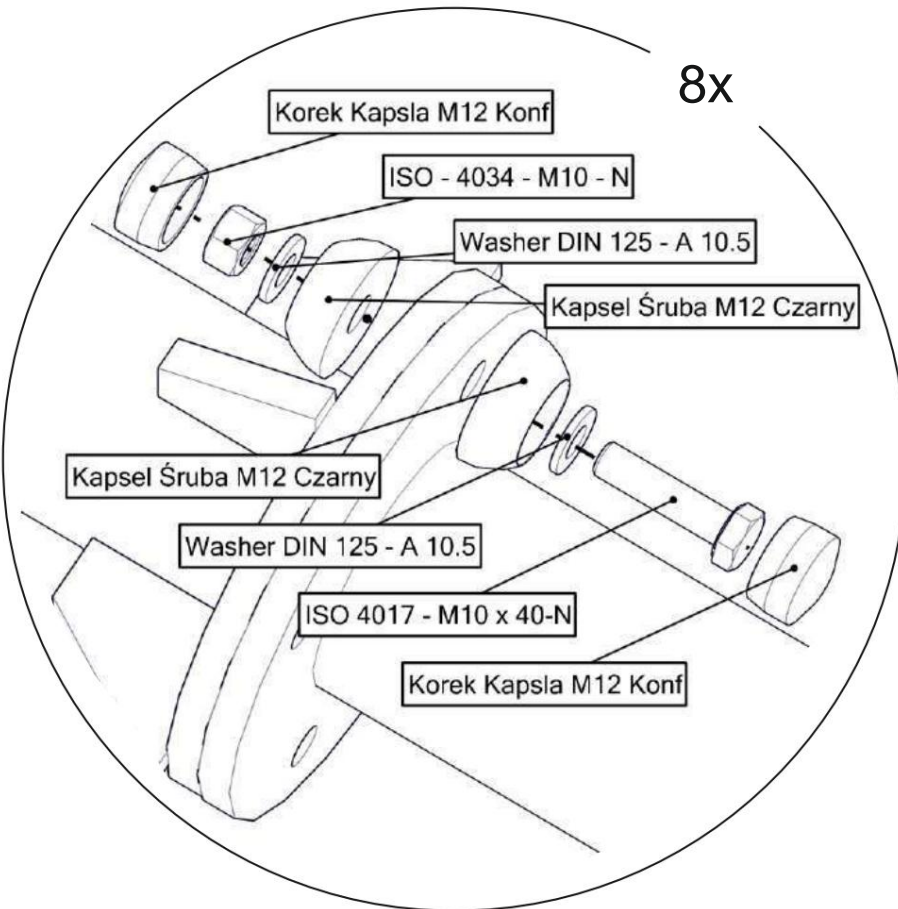
SIMBA[®]
Group

FOOT PRESS ASSEMBLY



**The foot press must be mounted to the pylon*

8x



ALL STAGES OF FOUNDATION AND ASSEMBLY MUST BE PHOTOGRAPHICALLY DOCUMENTED.
THE LACK OF PHOTOGRAPHIC DOCUMENTATION WILL AFFECT THE ISSUANCE OF THE WARRANTY CARD.

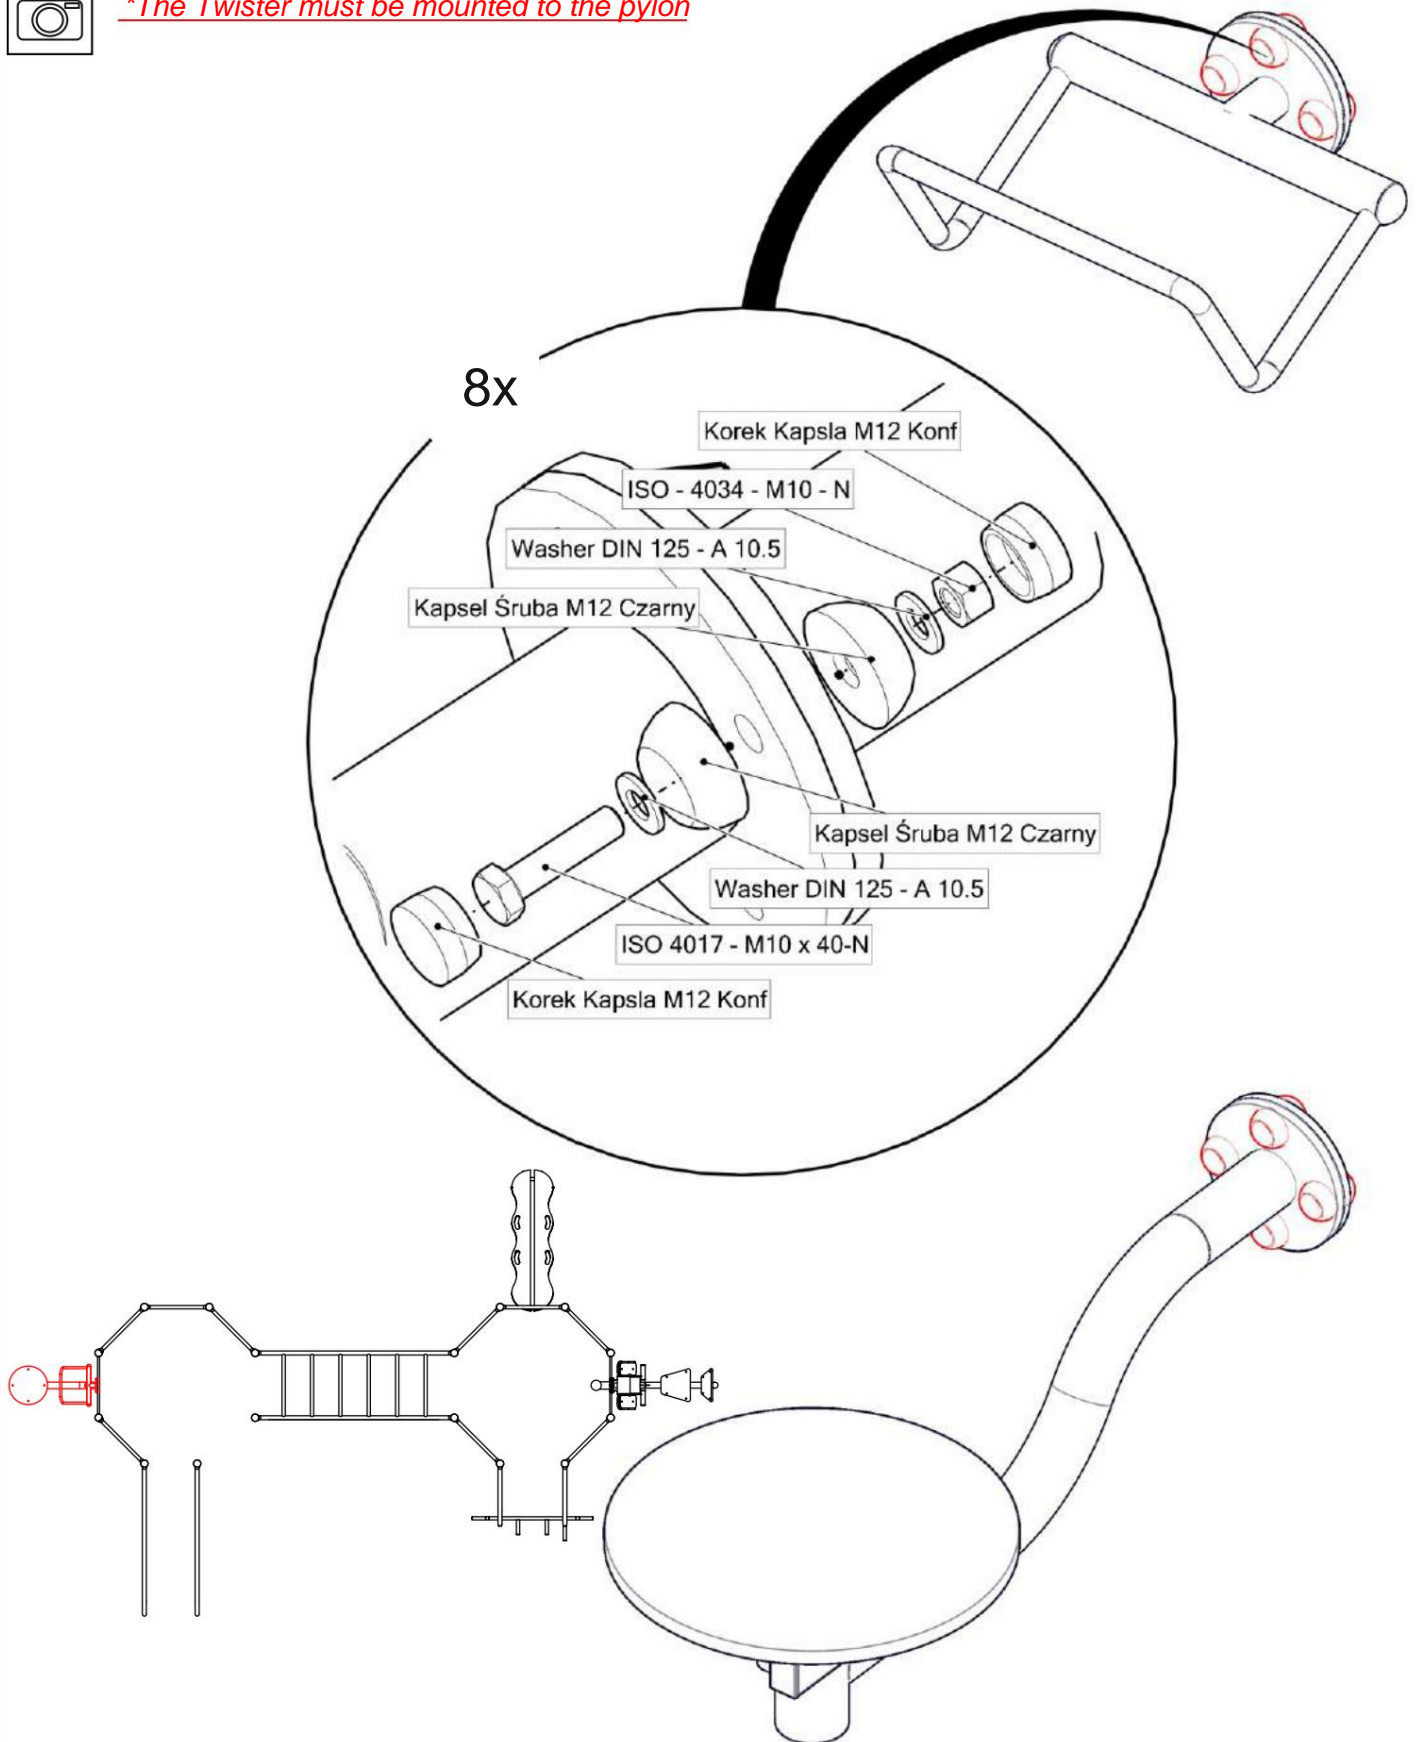


SIMBA[®]
Group

TWISTER ASSEMBLY



**The Twister must be mounted to the pylon*




ALL STAGES OF FOUNDATION AND ASSEMBLY MUST BE PHOTOGRAPHICALLY DOCUMENTED.

THE LACK OF PHOTOGRAPHIC DOCUMENTATION WILL AFFECT THE ISSUANCE OF THE WARRANTY CARD.



SIMBA[®]
Group

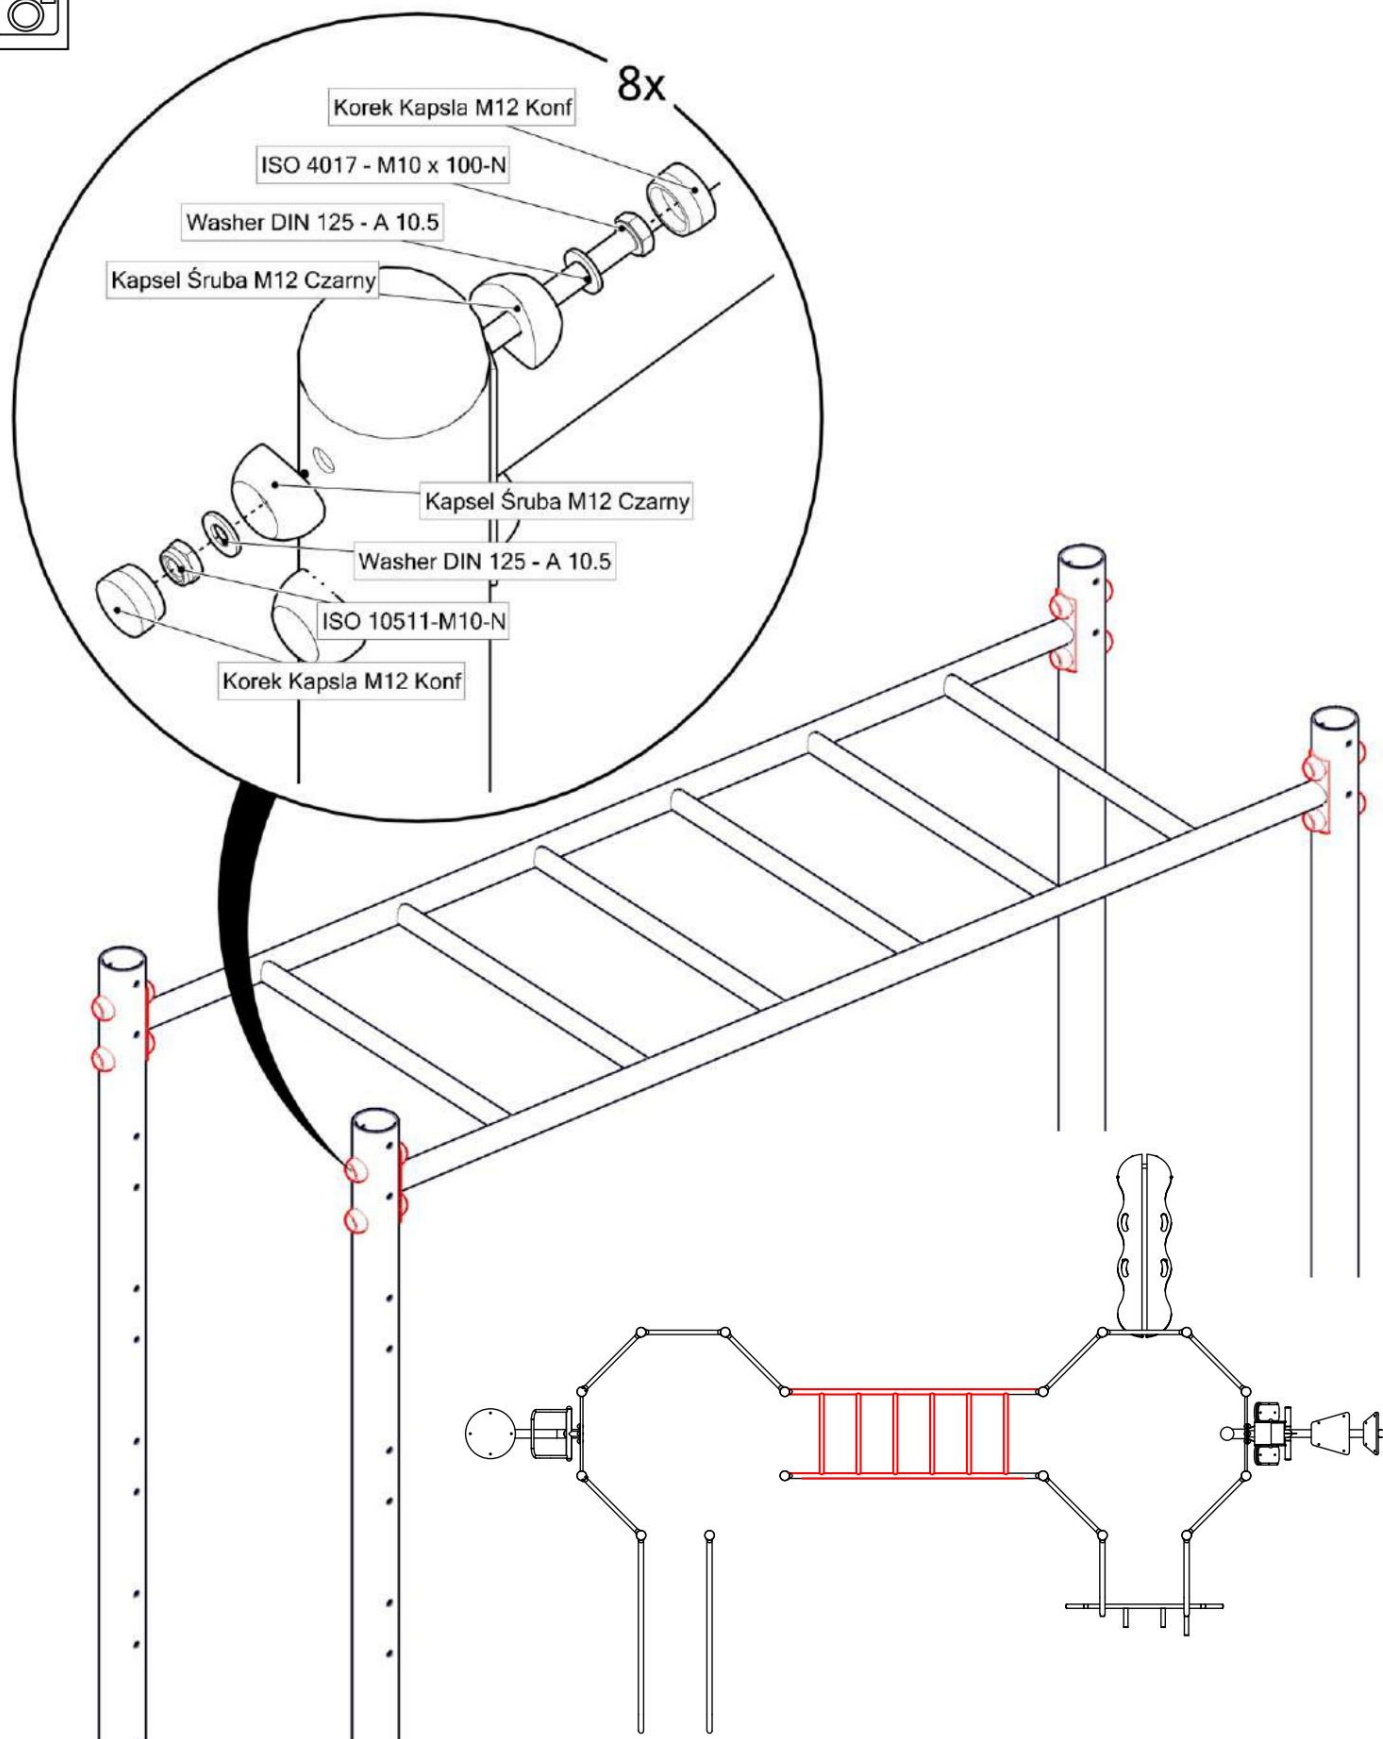INSTALLING THE HORIZONTAL LADDER






ALL STAGES OF FOUNDATION AND ASSEMBLY MUST BE PHOTOGRAPHICALLY DOCUMENTED.
THE LACK OF PHOTOGRAPHIC DOCUMENTATION WILL AFFECT THE ISSUANCE OF THE WARRANTY CARD.



SIMBA[®]
Group

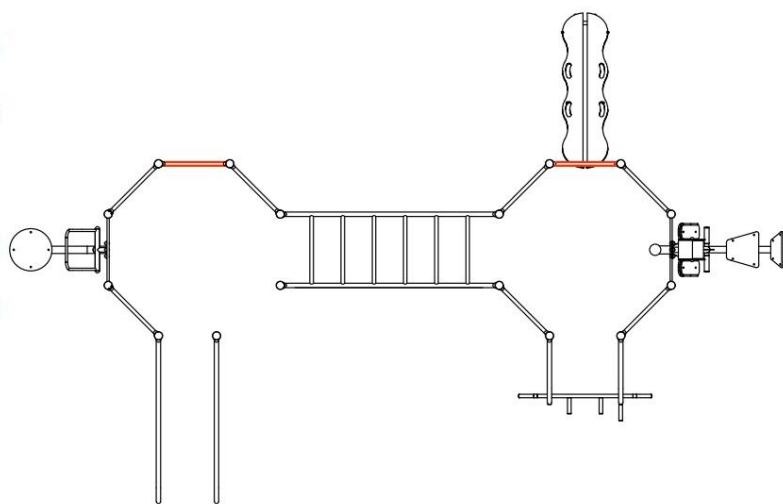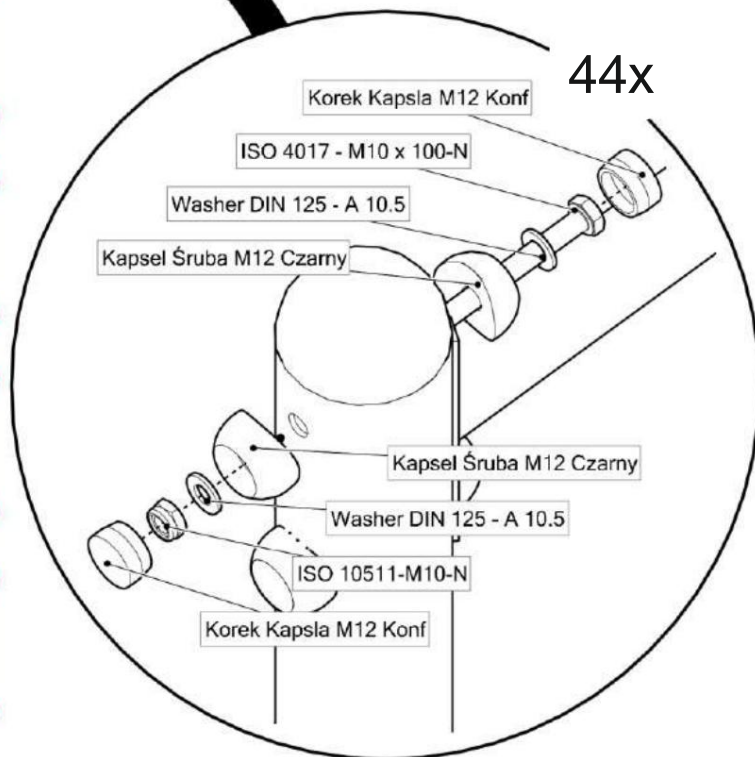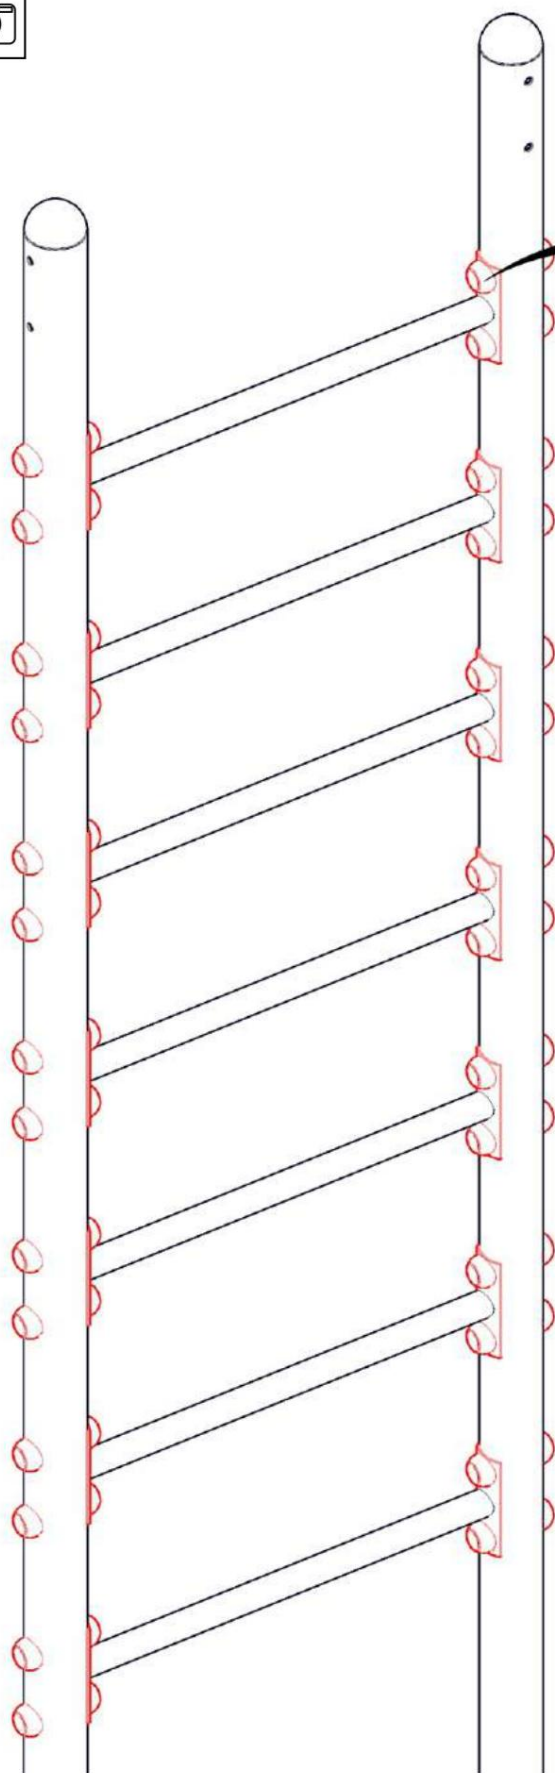INSTALLATION OF STRAIGHT BARS AND VERTICAL LADDER






ALL STAGES OF FOUNDATION AND ASSEMBLY MUST BE PHOTOGRAPHICALLY DOCUMENTED.
 THE LACK OF PHOTOGRAPHIC DOCUMENTATION WILL AFFECT THE ISSUANCE OF THE WARRANTY CARD.



SIMBA[®]
 Group

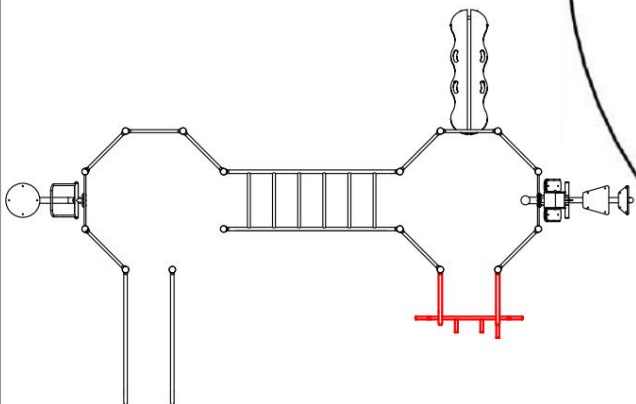
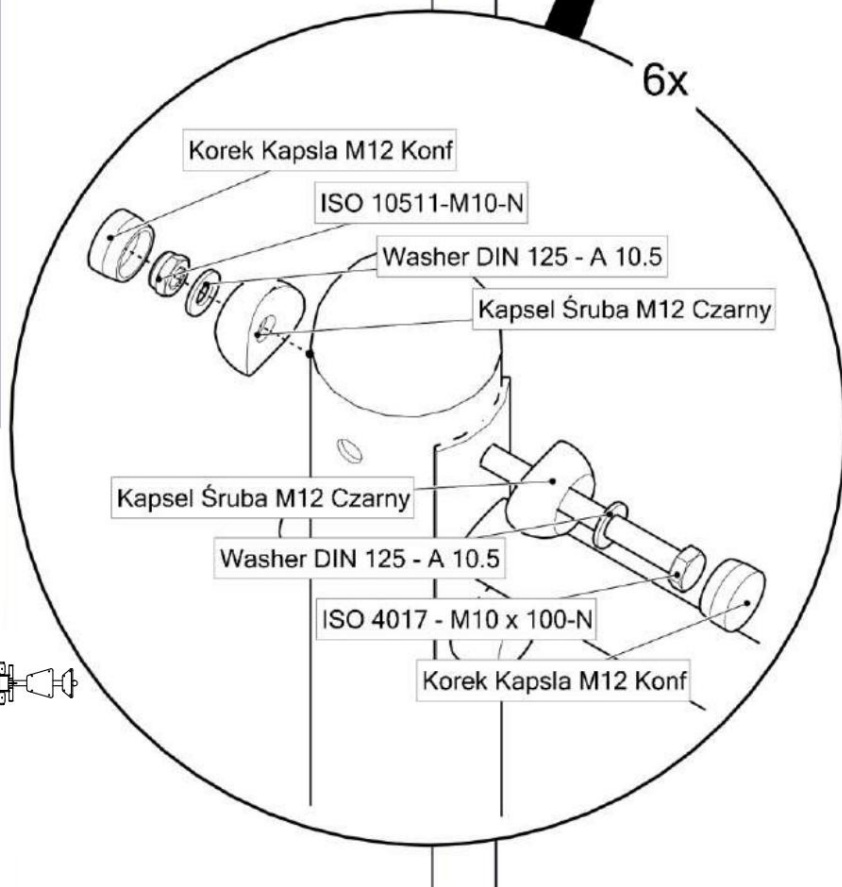
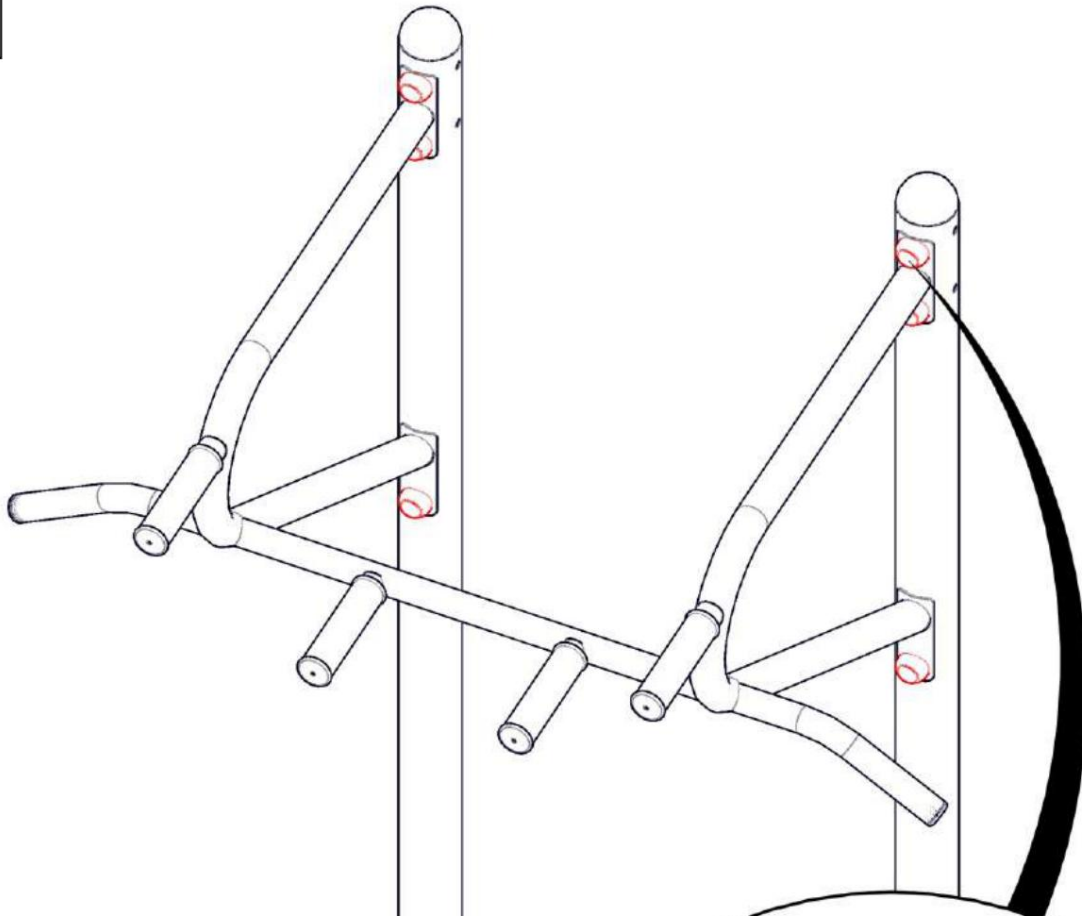
INSTALLING THE MULTIFUNCTIONAL STICK



ALL STAGES OF FOUNDATION AND ASSEMBLY MUST BE PHOTOGRAPHICALLY DOCUMENTED.
 THE LACK OF PHOTOGRAPHIC DOCUMENTATION WILL AFFECT THE ISSUANCE OF THE WARRANTY CARD.



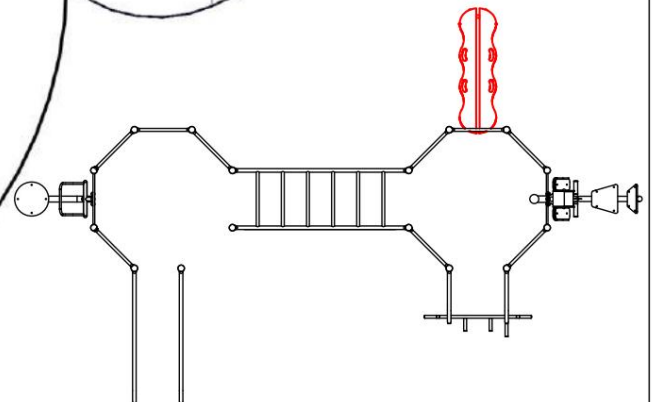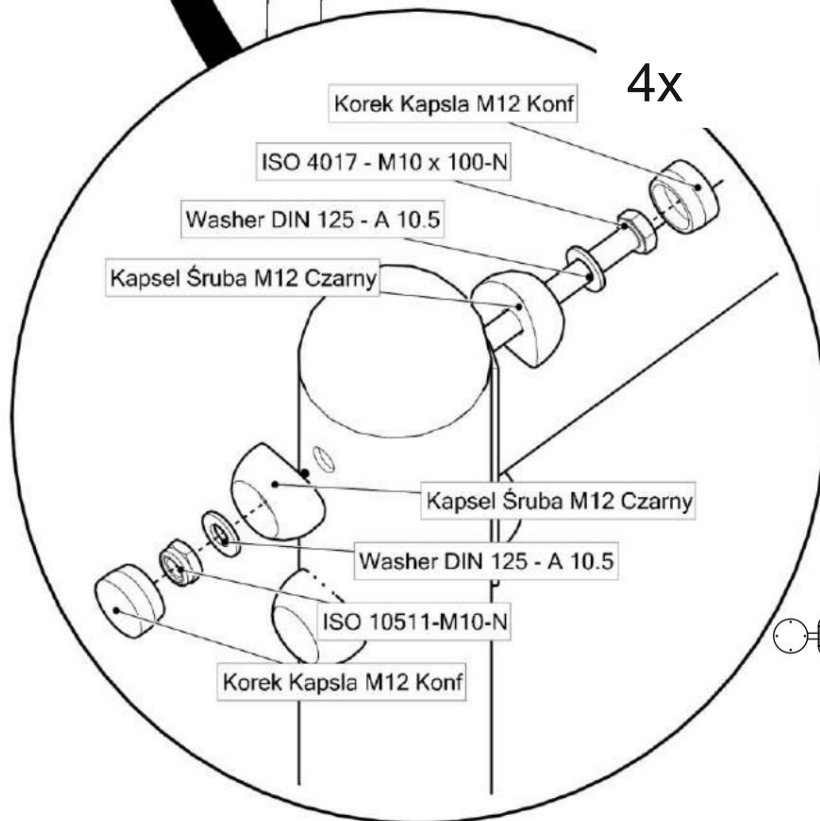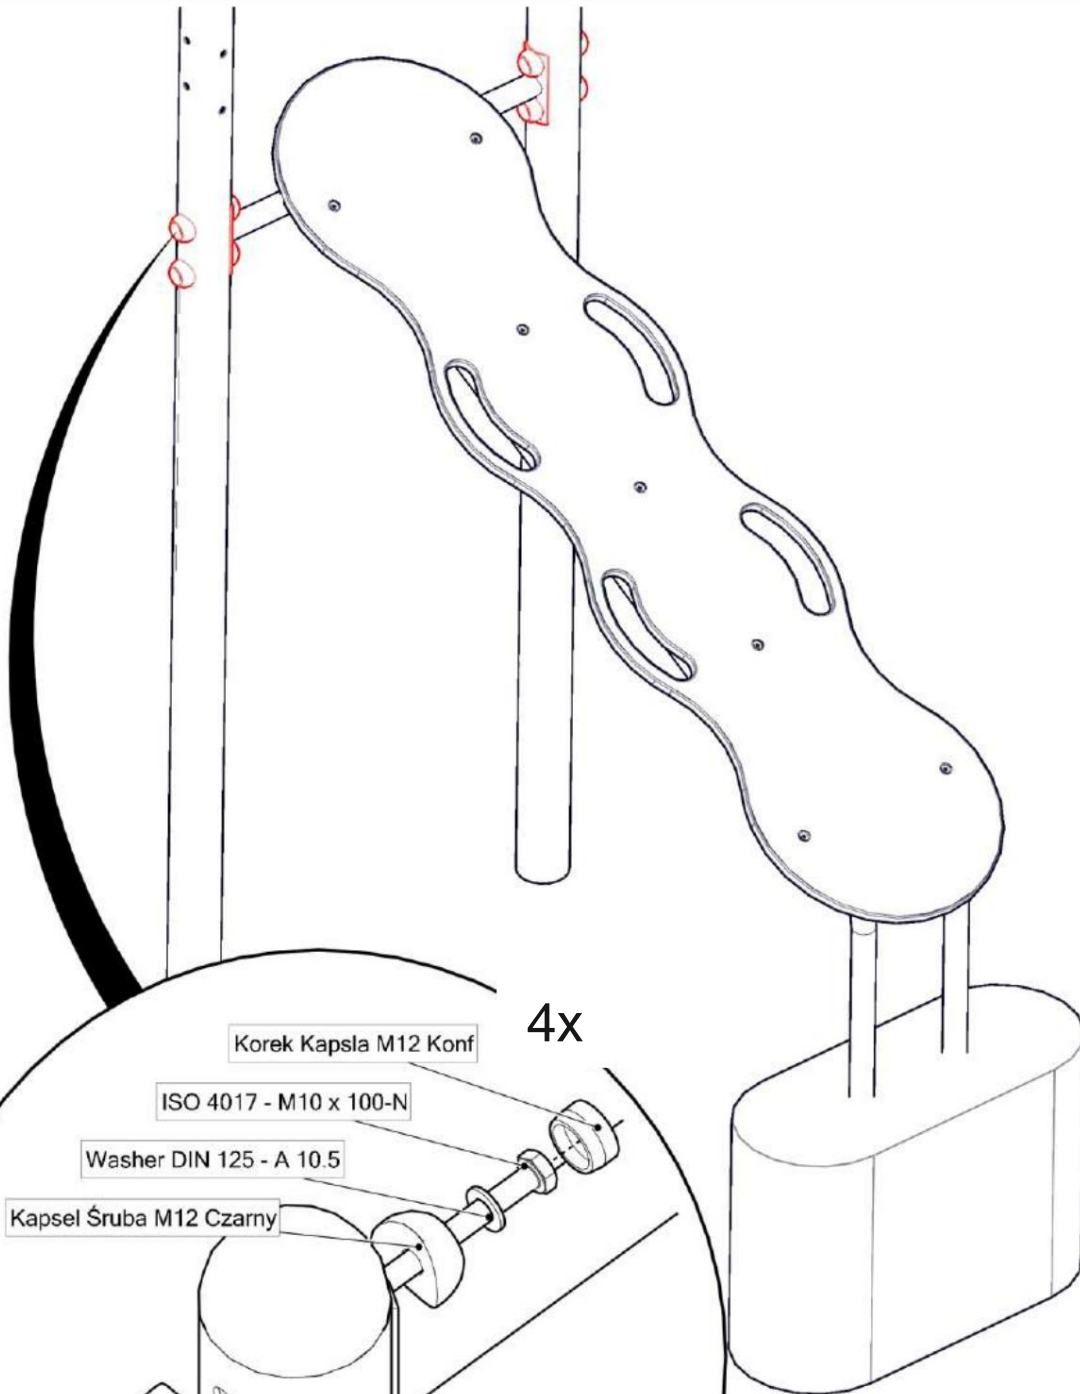INSTALLATION OF A HIGH INCLINED BENCH




ALL STAGES OF FOUNDATION AND ASSEMBLY MUST BE PHOTOGRAPHICALLY DOCUMENTED.
THE LACK OF PHOTOGRAPHIC DOCUMENTATION WILL AFFECT THE ISSUANCE OF THE WARRANTY CARD.



SIMBA[®]
Group

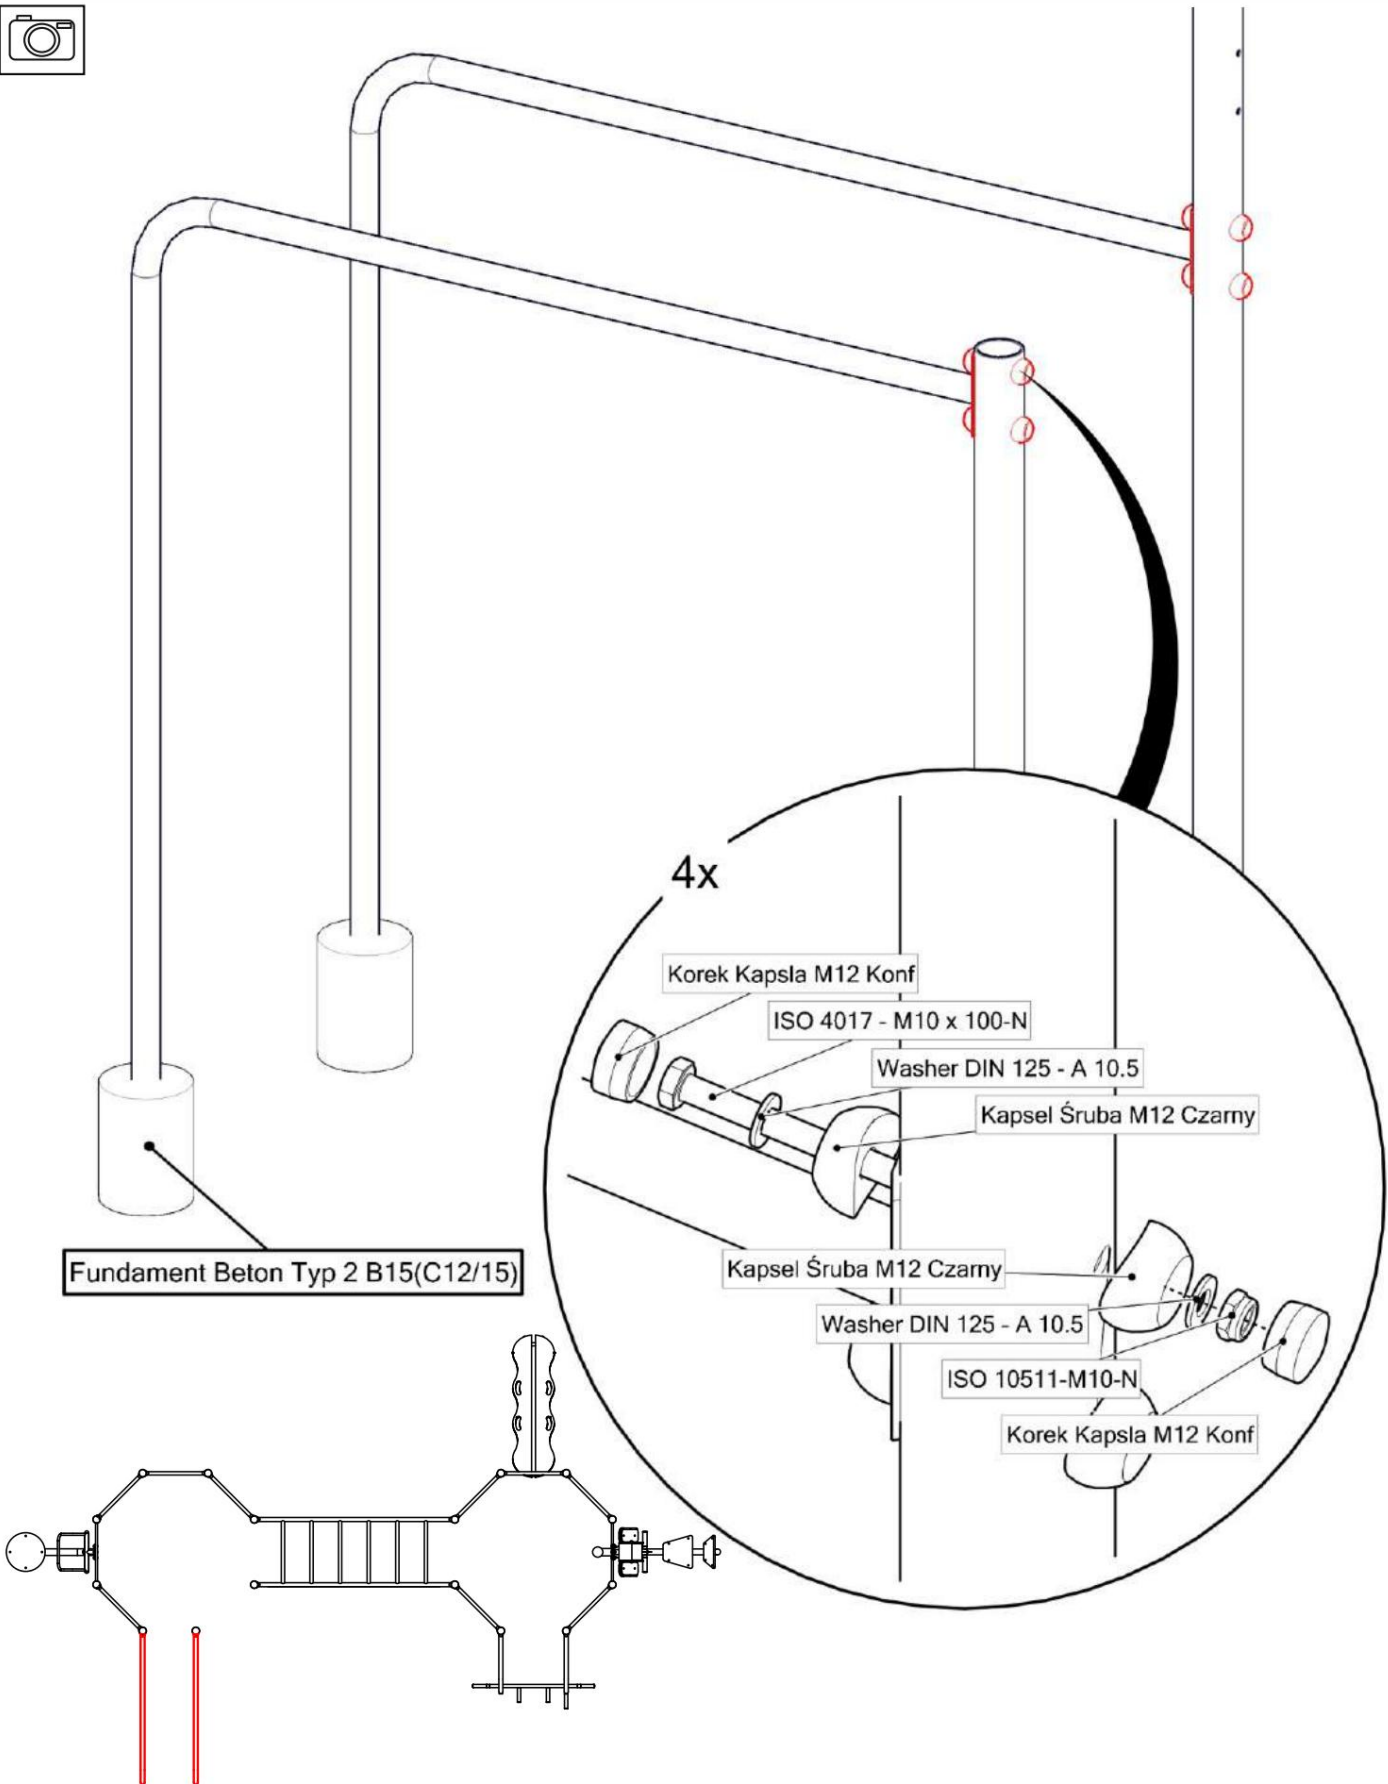INSTALLATION OF HIGH HANDRAIL



ALL STAGES OF FOUNDATION AND ASSEMBLY MUST BE PHOTOGRAPHICALLY DOCUMENTED.
 THE LACK OF PHOTOGRAPHIC DOCUMENTATION WILL AFFECT THE ISSUANCE OF THE WARRANTY CARD.

